




# SL4138 Series




## 1. Features:

- Ferrite based SMD Inductor with lower core loss.
- Inductance Range:220nH to 320nH. Custom values are welcomed.
- High current output chokes, upto 61 Amp with approx. 20% roll off.
- Low Profile 9.5mm Max. height .
- Foot Print 10.9 x 7.5 mm Max.
- Ideal for Buck Converter, VRM & High Density Board Design.
- Operating frequency up to 1 MHz application.
- Operating Temperature Range -55°C to + 130°C , RoHs compliance ;



## 2. Electrical Characteristic of SL4138 Series:

Part Number	Inductance (nH) ± 10%	DCR (mΩ) ± 5%	Isat <sup>1</sup> (A) @25°C	Isat <sup>2</sup> (A) @75°C	Isat <sup>3</sup> (A) @100°C	Isat <sup>4</sup> (A) @125°C	Irms (A) @25°C
SL4138A-R22KHF	220.00	0.22	61.00	55.00	52.00	45.00	45.00
SL4138A-R32KHF	320.00	0.22	36.00	33.00	31.00	27.00	45.00

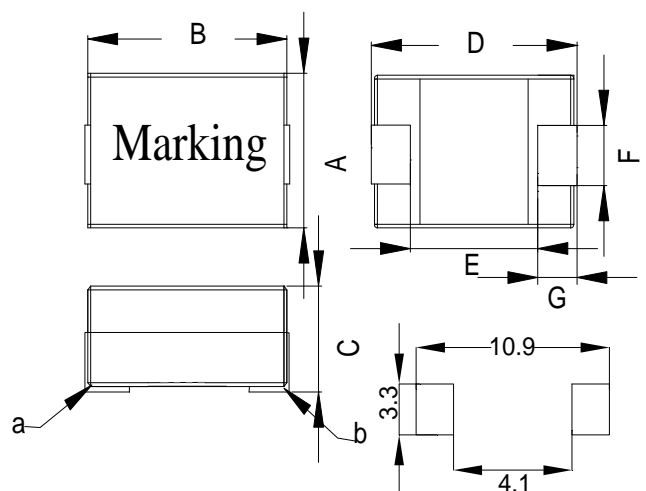

Suggested Pad Layout

## 3. Mechanical Dimension(Unit:mm):

A (Max.)	B (Max.)	C (Max.)	D (Max.)	E (Nom.)	F (Nom.)	G (Nom.)
7.50	10.60	9.50	10.90	5.00	2.80	2.80

### Note:

- 1>.Open Circuit Inductance (OCL) test condition:100KHz,1.0Vrms ,0Adc.
- 2>.Full Load Inductance (FLL) Test condition:100KHz,1.0Vrms ,Isat.
- 3>.Isat<sup>1</sup>,Isat<sup>2</sup>,Isat<sup>3</sup> & Isat<sup>4</sup>: DC current that will cause inductance to drop approximately by 20%.
- 4>. Irms: DC current for an approximate temperature rise of 40°C without core loss,.Derating is necessary for AC currents. PCB pad layout, trace thickness and width, air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed 130°C under worst case operating conditions verified in the end application.
- 5>.The nominal DCR is measured from point "a" to point"b",as shown above on the mechanical drawing.



# SL4138 Series



## Inductance vs. Current

